erkat®

Leaders in drum cutting technology

CUTTING EDGE TECHNOLOGY

For many applications, a smart solution

ER Range | ERC Range | ER-L Range | ADU Range

Working side by side

Transverse Drum Cutters are an excellent choice for rock or concrete wall and surface profiling, trenching, soft rock and frozen soil excavation and demolition.

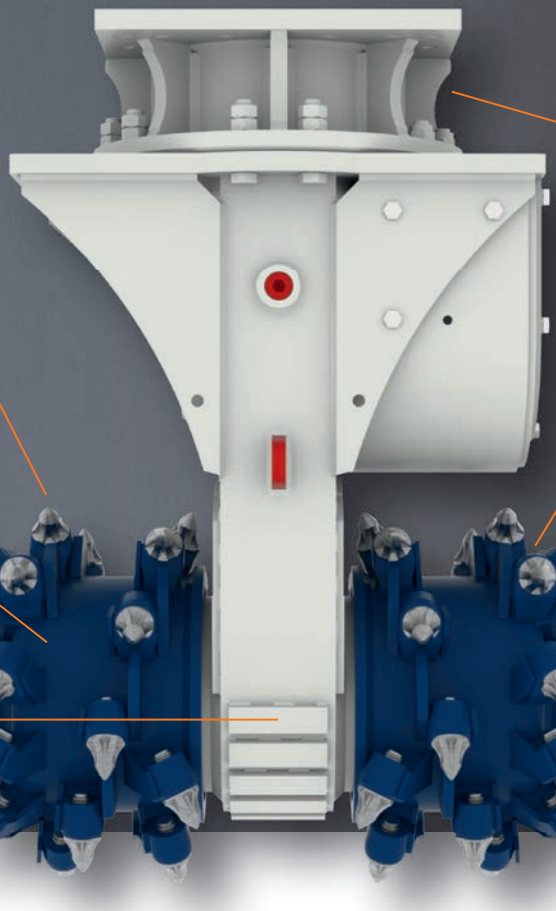

Extremely **robust spur gears** for optimum energy transmission and reliability

Mechanical **360° rotatable bracket** (ER 50–3000) with central fixing bolt for easy positioning of drum cutter

QuickSnap retaining system (ER 600–3000) for quick and easy pick changing

Adoptable high torque **gear motor** for higher productivity and motor lifetime

High load resistant **output shaft bearing system** with **lubrication-free slide ring seal system**

Large variety of cutting heads for various applications available

Pick sleeves (ER 650–5500) are replaceable

Robust housing design with HARDOX wear protection for higher uptime

ER range		ER 40X	ER 50X	ER 50	ER 100X	ER 100	ER 250X	ER 250	ER 600
Carrier weight class[1]	t	0.6–2	1–3	1–3	3–7	3–7	8–15	8–15	10–18
Service weight[2]	kg	110	170	200	330	350	520	570	900
Product weight	kg	90	130	160	290	310	450	500	820
Nominal power	kW	13	18	18	30	30	45	45	65
A	mm	495	610	615	805	805	940	965	1,130
B	mm	400	400	500	500	610	600	685	795
C	mm	225	225	240	370	370	400	450	575
Rotational speed	rpm	130	150	150	115	115	90	90	80
Optimum oil flow[3]	l/min	17–22	25–38	25–38	52–62	41–62	60–85	60–85	120–150
Max. torque[4]	Nm	960	1,420	1,420	3,000	3,000	5,200	5,200	10,100
Max. cutting force[4]	N	8,530	12,620	11,850	16,200	16,200	26,000	23,200	35,100
Pick shaft diameter	mm	11.4	11.4	15	20	20	20	22	25
Number of picks	pcs	40	40	56	44	64	44	44	48
Max. oil flow[5]	l/min	40	60	60	90	90	100	100	170
Max. operating pressure	bar	350	350	350	350	350	350	350	350

1) Weights apply to standard carriers only. Any variances must be agreed with Erkat and/or the carrier manufacturer prior to attachment.
2) Attachment with standard picks & average-sized adapter plate. 3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

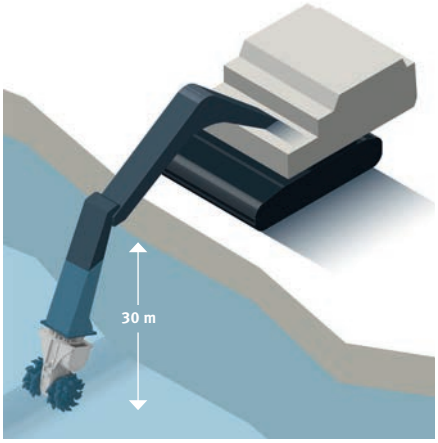

Can be used up to 30 meters underwater without additional installation or modification.

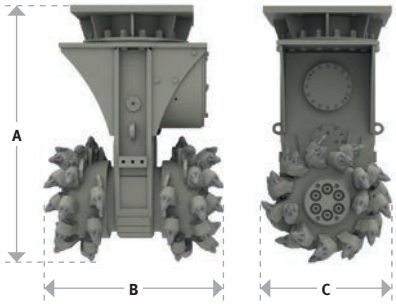

ER range		ER 650	ER 1500X	ER 1500XL	ER 1700	ER 2000X	ER 2000	ER 3000	ER 5500
Carrier weight class[1]	t	15–25	20–40	20–40	30–50	35–50	35–50	50–70	70–125
Service weight[2]	kg	1,200	2,000	2,100	2,450	2,700	2,900	4,000	7,000
Product weight	kg	1,000	1,750	1,850	2,200	2,400	2,600	3,500	6,000
Nominal power	kW	80	120	120	120	160	160	200	400
A	mm	1,250	1,425	1,425	1,425	1,600	1,600	1,650	1,970
B	mm	800	880	1,000	1,040	1,050	1,250	1,330	1,600
C	mm	585	720	720	720	720	720	805	920
Rotational speed	rpm	80	75	75	72	65	65	53	48
Optimum oil flow[3]	l/min	140–190	205–300	205–300	290–360	300–390	300–390	350–450	700–950
Max. torque[4]	Nm	12,400	23,400	23,400	27,900	31,500	31,500	46,800	111,500
Max. cutting force[4]	N	42,400	65,000	65,000	77,500	87,500	87,500	116,300	242,400
Pick shaft diameter	mm	30	30	30	30	30	30	38–30	38
Number of picks	pcs	44	44	48	56	56	56	64	68
Max. oil flow[5]	l/min	210	320	320	360	410	410	500	1,000
Max. operating pressure	bar	350	350	350	350	350	350	350	350

1) Weights apply to standard carriers only. Any variances must be agreed with Erkat and/or the carrier manufacturer prior to attachment.
2) Attachment with standard picks & average-sized adapter plate. 3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

Cutting the competition

The integrated hydraulic rotation for our Drum Cutters allows for even more productive, precise and accurate work in challenging tasks.

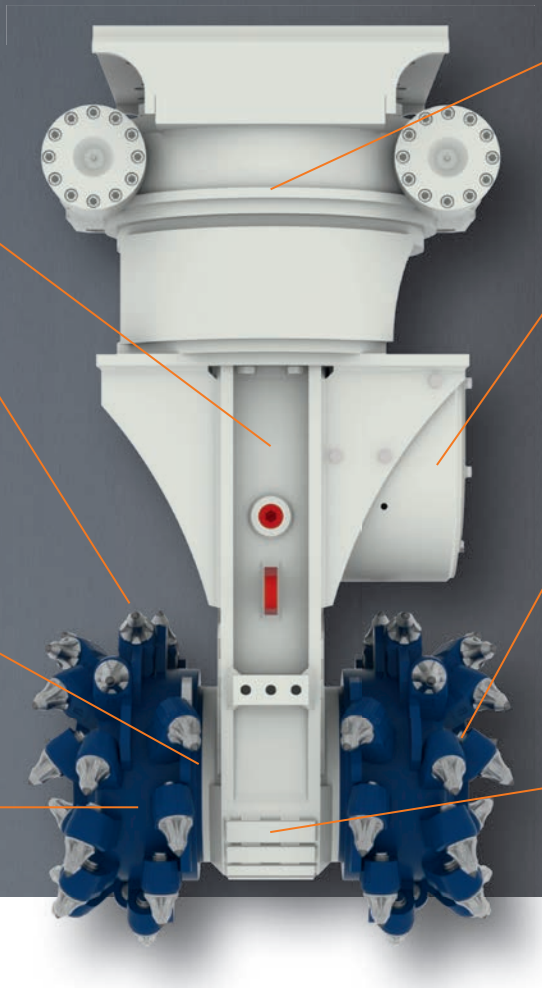

360° endless hydraulic rotation allows optimal positioning and precise handling

Adoptable high torque **gear motor** for higher productivity and motor lifetime

Extremely **robust spur gears** for optimum energy transmission and reliability

QuickSnap retaining system (ERC 600–3000) for quick and easy pick changing

Pick sleeves (ERC 650–5500) are replaceable

High load resistant **output shaft bearing system** with **lubrication-free slide ring seal system**

Large variety of cutting heads for various applications available

Robust housing design with HARDOX wear protection for higher uptime

ERC range		ERC 50	ERC 100	ERC 250	ERC 600	ERC 650	ERC 1500X	ERC 1500XL
Carrier weight class [1]	t	1–3	3–7	8–15	10–18	15–25	20–40	20–40
Service weight [2]	kg	340	530	950	1,280	1,760	2,700	2,800
Product weight	kg	300	490	880	1,200	1,560	2,450	2,550
Nominal power	kW	18	30	45	65	80	75	120
A	mm	795	1,085	1,325	1,500	1,665	1,870	1,870
B	mm	500	610	685	795	800	880	1,000
C	mm	240	370	450	575	585	720	720
Rotational speed	rpm	150	115	90	80	80	75	75
Optimum oil flow [3]	l/min	25–38	41–62	60–85	120–150	140–190	205–300	205–300
Max. torque [4]	Nm	1,420	3,000	5,200	10,100	12,400	23,400	23,400
Max. cutting force [4]	N	11,850	16,200	23,200	35,100	42,400	65,000	65,000
Pick shaft diameter	mm	15	20	22	25	30	30	30
Number of picks	pcs	56	64	44	48	44	44	48
Max. oil flow [5]	l/min	60	90	100	170	210	320	320
Max. operating pressure	bar	350	350	350	350	350	350	350
Max. oil flow (rotation) [5]	l/min	10	10	30	30	40	40	40
Max. operating pressure (rotation)	bar	160	160	160	160	160	160	160

1) Weights apply to standard carriers only. Any variances must be agreed with Erkat and/or the carrier manufacturer prior to attachment.
2) Attachment with standard picks & average-sized adapter plate. 3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

ERC range		ERC 1700	ERC 2000	ERC 3000
Carrier weight class [1]	t	30–50	35–55	50–70
Service weight [2]	kg	3,240	3,600	5,700
Product weight	kg	2,990	3,300	5,200
Nominal power	kW	120	160	200
A	mm	1,855	1,970	2,220
B	mm	1,040	1,250	1,330
C	mm	720	720	805
Rotational speed	rpm	72	65	53
Optimum oil flow [3]	l/min	290–360	300–390	350–450
Max. torque [4]	Nm	27,900	31,500	46,800
Max. cutting force [4]	N	77,500	87,500	116,300
Pick shaft diameter	mm	30	30	38–30
Number of picks	pcs	56	56	64
Max. oil flow [5]	l/min	400	410	500
Max. operating pressure	bar	350	350	350
Max. oil flow (rotation) [5]	l/min	40	40	60
Max. operating pressure (rotation)	bar	160	160	160

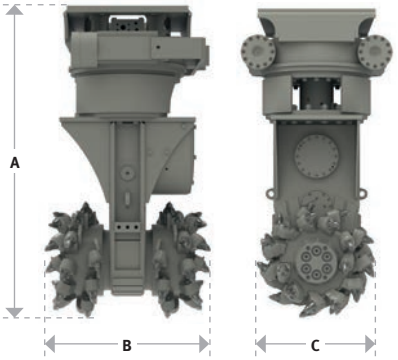

1) Weights apply to standard carriers only. Any variances must be agreed with Erkat and/or the carrier manufacturer prior to attachment. 2) Attachment with standard picks & average-sized adapter plate.
3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

Clean cuts

Cutting Wheels converts the Drum Cutter into an effective precision tool for narrow trenches or targeted slits in rock, concrete or asphalt.

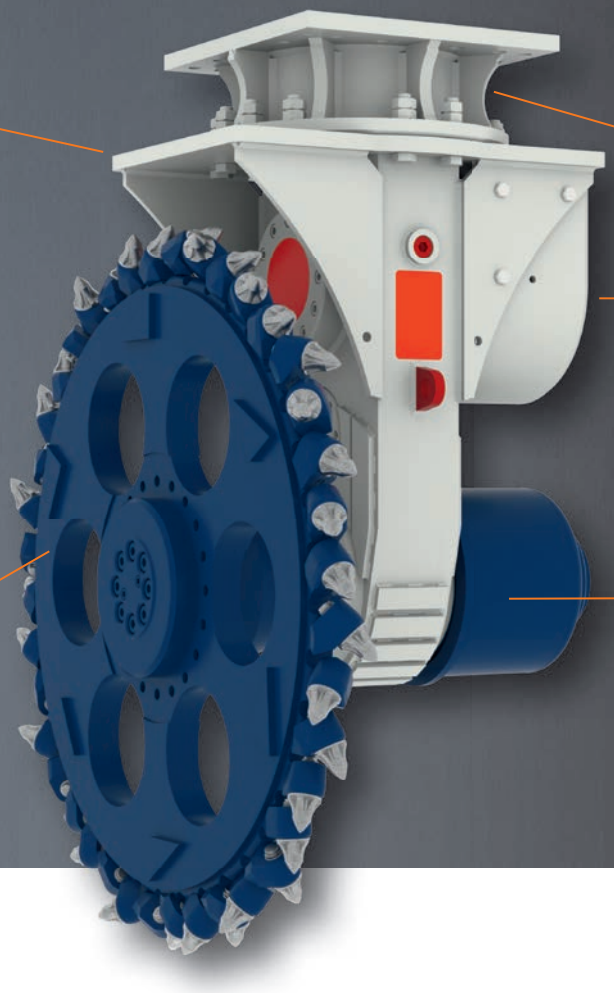

Mechanical **360° rotatable bracket** with central fixing bolt for easy positioning of drum cutter (ER 50–3000) or **360° endless hydraulic rotation** allows optimal positioning and precise handling (ERC 50–3000)

Extremely **robust spur gears** for optimum energy transmission and reliability

Adoptable high torque **gear motor** for higher productivity and motor lifetime

Cutting wheel fixed on standard drive shaft

Robust protection cover for output drive shaft

ER range		ER 50	ER 100	ER 250	ER 600	ER 650	ER 1500X	ER 1500XL	ER 1700	ER 2000	ER 3000
Carrier weight class[1]	t	1–3	3–7	8–15	10–18	15–28	20–40	20–40	30–50	35–55	50–70
Service weight[2]	kg	205	350	570	925	1,250	2,050	2,100	2,350	3,000	4,100
Product weight	kg	165	310	500	845	1,050	1,800	1,850	2,100	2,700	3,600
Nominal power	kW	18	30	45	65	80	120	120	120	160	200
A (Total length)	mm	735	945	1,175	1,320	1,430	1,855	1,855	1,855	2,130	2,250
B (Wheel diameter)	mm	480	650	870	950	950	1,580	1,580	1,580	1,780	2,000
Rotational speed	rpm	150	115	90	80	80	75	75	72	65	53
Optimum oil flow[3]	l/min	25–38	41–62	60–85	120–150	140–190	205–300	205–300	290–360	300–390	350–450
Max. torque[4]	Nm	1,420	3,000	5,200	10,100	12,400	23,400	23,400	27,900	31,500	46,800
Number of picks	pcs	30	35	40	40	36	36	36	36	36	36
Max. oil flow[5]	l/min	60	90	100	170	210	320	320	360	410	500
Max. operating pressure	bar	350	350	350	350	350	350	350	350	350	350

1) Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.
2) Attachment with standard picks & average-sized adapter plate. 3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

Cut narrow trenches
for pipes or cables
in just one go.

Model	Cutting depth C	Cutting width D in mm						
		55	80	100	120	150	200	250
ER/ERC 50	150 mm	●	●					
ER/ERC 100	200 mm		●	●	●			
ER/ERC 250	300 mm		●	●		●	●	
ER/ERC 600	300 mm		●	●		●	●	
ER/ERC 650	300 mm			●		●	●	
ER/ERC 1500	560 mm			●		●	●	●
ER/ERC 1700	560 mm					●	●	●
ER/ERC 2000	650 mm					●	●	●
ER/ERC 3000	700 mm					●	●	●

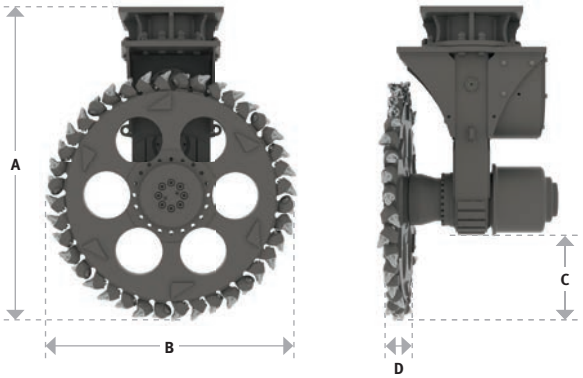

ERC range		ERC 50	ERC 100	ERC 250	ERC 600	ERC 650	ERC 1500X	ERC 1500XL	ERC 1700	ERC 2000	ERC 3000
Carrier weight class[1]	t	1–3	3–7	8–15	10–18	15–25	20–40	20–40	30–50	35–55	50–70
Service weight[2]	kg	340	515	945	1,300	1,800	2,750	2,800	3,150	3,800	5,800
Product weight	kg	300	475	875	1,220	1,600	2,500	2,550	2,900	3,500	5,300
Nominal power	kW	18	30	45	65	80	120	120	120	160	200
A (Total length)	mm	915	1,225	1,540	1,685	1,845	2,300	2,300	2,300	2,520	2,820
B (Wheel diameter)	mm	480	650	870	950	950	1,580	1,580	1,580	1,780	2,000
Rotational speed	rpm	150	115	90	80	80	75	75	72	65	53
Optimum oil flow[3]	l/min	25–38	41–62	60–85	120–150	140–190	205–300	205–300	290–360	300–390	350–450
Max. torque[4]	Nm	1,420	3,000	5,200	10,100	12,400	23,400	23,400	27,900	31,500	46,800
Number of picks	pcs	30	35	40	40	36	36	36	36	36	36
Max. oil flow[5]	l/min	60	90	100	170	210	320	320	360	410	500
Max. operating pressure	bar	350	350	350	350	350	350	350	350	350	350

1) Weights apply to standard carriers only. Any variances must be agreed with Epiroc and/or the carrier manufacturer prior to attachment.
2) Attachment with standard picks & average-sized adapter plate. 3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

Diggin’ ditches

Axial Drum Cutters are designed for narrow trenching, pile head removal and gutter cleaning.

Robust housing for higher uptime

Adoptable **high torque radial piston motor** for higher productivity

Strong and **lubrication-free bearing system** for minimum downtime

Large variety of cutting heads for various applications available

Cutter head can be replaced by auger for soft rock drilling

ER-L range		ER 100L	ER 250L	ER 400L	ER 450L	ER 600L
Carrier weight class[1]	t	3–7	8–15	12–17	12–17	15–22
Service weight[2]	kg	250	410	440	450	660
Product weight	kg	210	340	365	375	580
Nominal power	kW	30	45	65	65	65
A	mm	810	1,130	1,130	1,160	1,340
B	mm	310	355	355	380	550
C	mm	370	400	400	450	535
Rotational speed	rpm	110	90	80	80	80
Optimum oil flow[3]	l/min	52–62	60–85	120–150	120–150	120–150
Max. torque[4]	Nm	3,120	5,200	10,400	10,400	10,400
Max. cutting force[4]	N	16,900	26,000	52,000	46,200	38,900
Pick shaft diameter	mm	20	20	20	22	22
Number of picks	pcs	32	44	44	30	42
Max. oil flow[5]	l/min	90	100	170	170	170
Max. operating pressure	bar	350	350	350	350	350

1) Weights apply to standard carriers only. Any variances must be agreed with Erkat and/or the carrier manufacturer prior to attachment.
2) Attachment with standard picks & average-sized adapter plate. 3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

Can be used up to 30 meters underwater without additional installation or modification.

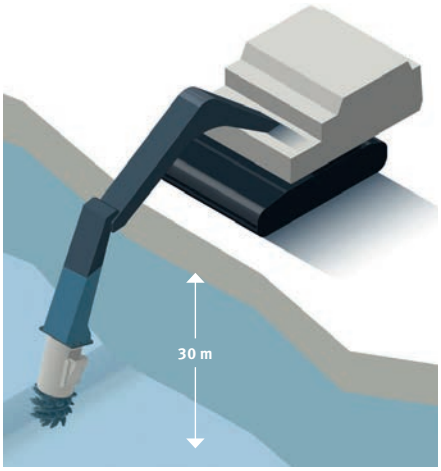

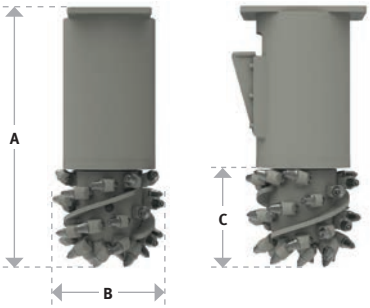

ER-L range		ERL 700	ERL 1100	ER 1500L	ER 2000L
Carrier weight class [1]	t	15–25	25–35	20–40	35–50
Service weight [2]	kg	700	900	1,450	1,800
Product weight	kg	600	660	1,200	1,500
Nominal power	kW	70	120	120	160
A	mm	1,230	1,270	1,440	1,500
B	mm	390	430	590	600
C	mm	450	500	680	720
Rotational speed	rpm	75	75	75	65
Optimum oil flow [3]	l/min	160	240–300	200–300	300–390
Max. torque [4]	Nm	11,700	23,400	23,400	33,500
Max. cutting force [4]	N	52,000	93,600	68,800	93,000
Pick shaft diameter	mm	22	30	30	30
Number of picks	pcs	30	26	24	28
Max. oil flow [5]	l/min	200	320	320	410
Max. operating pressure	bar	350	350	350	350

1) Weights apply to standard carriers only. Any variances must be agreed with Erkat and/or the carrier manufacturer prior to attachment.
2) Attachment with standard picks & average-sized adapter plate. 3) Various motor variants available per model. 4) at 350 bar 5) at 10 bar

Know the drill

Based on our Drum Cutter technology, the auger drives are ideal for challenging soil and soft rock drilling operations.

Compact housing design
for easy handling

High torque radial piston motor
for higher productivity

Strong and **lubrication-free bearing system** for minimum downtime

Hexagonal adapter available in different sizes (H)

Quick auger exchange
for high flexibility

Large variety of augers
for various applications available

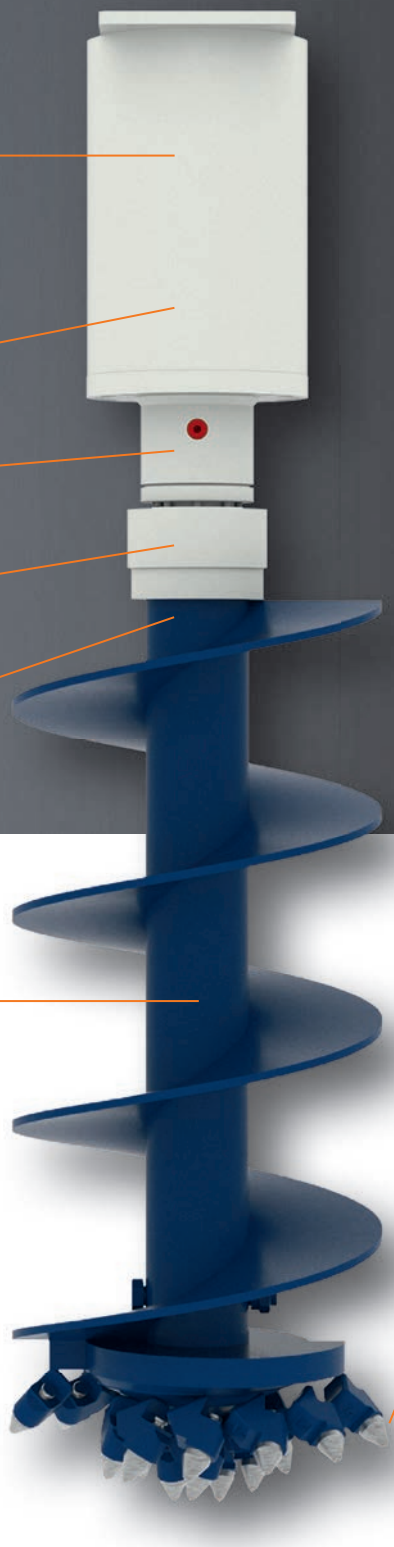



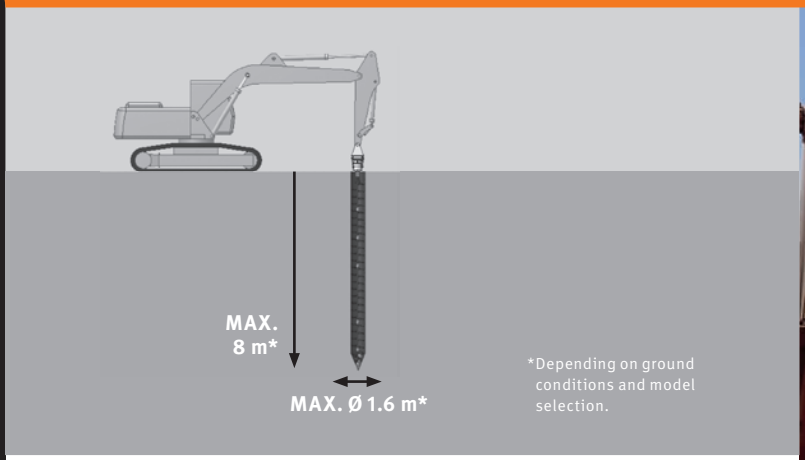

*Depending on ground conditions and model selection.

Soil Classifications [5]

	1	Topsoil
	2	Liquid Soil
	3	Soil easy to excavate
	4	Soil medium hard to excavate
	5	Soil hard to excavate
	6	Rock easy to excavate (max. 60 MPa) & similar soil
	7	Rock hard to excavate (max. 60 MPa)

Choice of drill bits for various ground conditions

ADU range		ADU 100	ADU 250	ADU 450	ADU 600	ERL 700	ERL 1100	ADU 1500	ADU 2000
Carrier weight class [1]	t	3–6	8–15	8–17	14–22	15–30	18–35	18–40	30–50
Service weight [2]	kg	280	420	445	750	800	1,090	1,370	2,050
Product weight	kg	240	350	370	670	700	850	1,120	1,750
Nominal power	kW	30	45	65	65	70	120	120	160
A	mm	900	810	810	1,260	1,090	1,090	1,200	1,250
B	mm	300	350	360	350	400	400	600	660
H	mm	80	80	80	80/120/160	80/120/160	80/120/160	80/120/160	120/160
Rotational speed	rpm	50–110	40–80	40–80	40–80	50–90	50–70	50–70	30–60
Optimum oil flow [3]	l/min	30–60	40–75	75–150	75–150	105–170	200–300	200–300	200–360
Max. torque [4]	Nm	3,120	5,200	10,400	10,400	11,700	23,400	23,400	33,500
Max. oil flow	l/min	90	85	170	170	200	320	320	400
Max. operating pressure	bar	350	350	350	350	350	350	350	350
Drilling capabilities									
Max. drilling depth	mm	3,500	5,000	5,000	6,000	6,000	7,000	7,000	8,000
Max. drilling diameter (Soil class 1–3 [5])	mm	400	500	800	900	1,000	1,500	1,500	1,600
Max. drilling diameter (Soil class 4–5 [5])	mm	300	400	600	700	900	1,200	1,200	1,500
Max. drilling diameter (Soil class 6–7 [5])	mm	–	300	500	500	600	900	900	1,100

1) Weights apply to standard carriers only. Any variances must be agreed with Erkat and/or the carrier manufacturer prior to attachment.
2) Attachment with average-sized adapter plate. 3) at 200 bar. 4) at 350 bar. 5) according to DIN 18300.

erkat has a global network of experienced business partners including their own subsidiaries and distributors.
For more information please contact **www.erkat.de**

Your local dealer

BREAKERS & ATTACHMENTS

Western Australia:

+61 8 9248 9800
+61 8 9209 3697

71 Prestige Parade
Wangara, Perth
WA 6065

Queensland & NT:

+61 7 3635 7333
+61 7 3635 7355

76 Dulacca Street
Acacia Ridge,
Brisbane QLD 4110

WWW.BAEG.COM.AU
sales@baeg.com.au

This catalogue is used to describe our products and the accessories. The information contained in it does not imply any certified properties or indicate any suitability for certain or assumed purposes. Technical changes are reserved without prior announcement. We disclaim any liability arising from the illustrations and information in the catalogue and from all our representatives.

9864 0081 01 2019-03 Essen, Germany. Legal Notice © Copyright 2019, Construction Tools GmbH, Essen, Germany.

erkat | Anbaufräsen PC GmbH
Ulmenstraße 3
36469 Bad Salzungen OT Hämbach
Germany

Phone +49 3695 85109-0
Fax +49 3695 85109-99
E-mail info@erkat.de
Internet www.erkat.de

erkat®